Xede Wiring Diagram – Mazda MX5 SE

Wiring Details:

Note: Connectors are drawn as seen from the wire side.

XEDE Configuration:	H
XEDE Revisions:	All
XEDE Harness:	XH-WBG (Generic Harness)
Special Notes / Information:	See Diagram Over Page

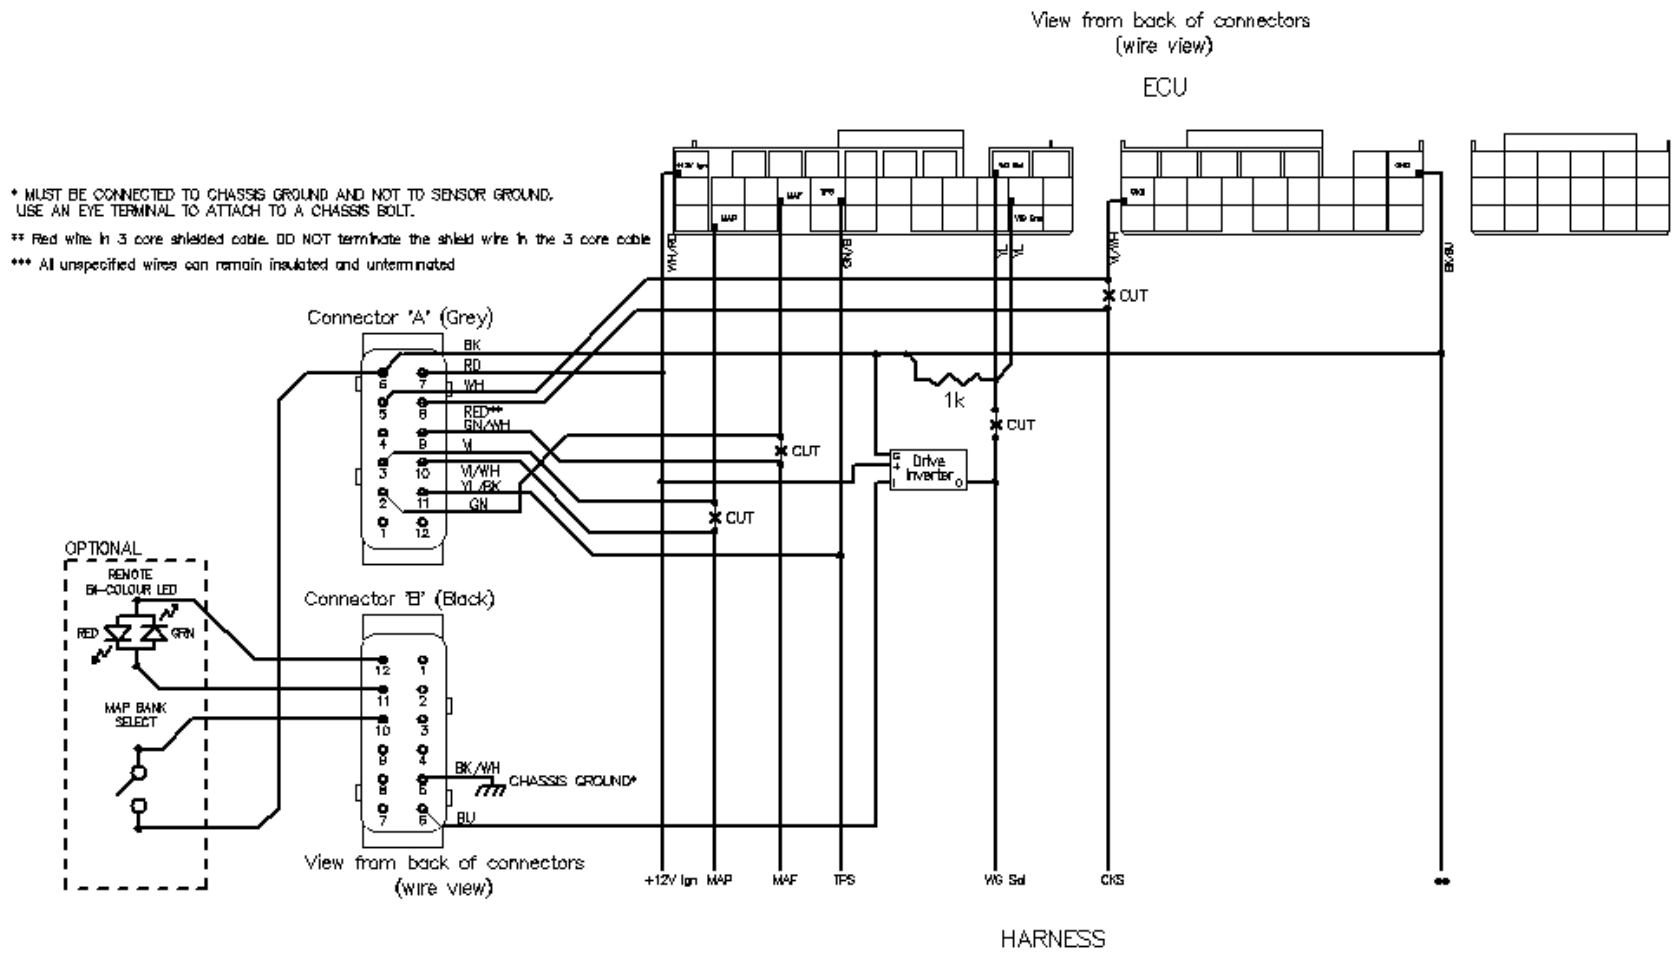
View from back of connectors
(wire view)
ECU
* MUST BE CONNECTED TO CHASSIS GROUND AND NOT TO SENSOR GROUND.
USE AN EYE TERMINAL TO ATTACH TO A CHASSIS BOLT.
** Red wire in 3 core shielded cable. DO NOT terminate the shield wire in the 3 core cable
*** All unspecified wires can remain insulated and unterminated
Connector 'A' (Grey)
BK
RD
WH
RED**
GN/WH
VI
VI/WH
VI/BK
GN
CUT
1k
Drive Inverter
OPTIONAL
REMOTE
BI-COLOUR LED
RED
GRN
MAP BANK
SELECT
Connector 'B' (Black)
BK/WH
CHASSIS GROUND*
BU
View from back of connectors
(wire view)
+12V Ign
MAP
MAF
TPS
WG Sol
CKS
HARNESS